



# UNDER-BENCH AIR CONDITIONER

COOLING AND HEATING FOR VEHICLES OF ALL SIZES

Is the under-bench storage space still free? Then there are a number of reasons for housing the air conditioner there: no roof load, and the centre of gravity and outside dimensions of the vehicle remain unaffected – meaning the vehicle will still fit under the carport at home.

With the FreshWell 3000 Dometic offers the most compact under-bench air conditioner available in the category up to 2700 watts. Featuring state-of-the-art heat pump technology, this air conditioner



will gladly serve as a powerful heating on cool days.

FreshWell 3000 is superbly quiet in operation. Its air diffuser system generates a pleasant air stream, which is distributed evenly over three air outlets with the help of accessories. The outlets can be positioned in the vehicle as required – concentrated at one point, and also in different rooms. With the matching DC kit, your under-bench air conditioner can even be used while driving.

## INDIVIDUALLY ADAPTABLE AIR DISTRIBUTION SYSTEM

Once FreshWell 3000 has been installed, the air distribution system can be customised to meet individual preferences using the supplementary accessories. It provides the option of concentrating all three air outlets in one place and directing them onto one single

point. Alternatively, the vents can be fitted on different places inside so that the air streams are directed to particular points, such as the dining or sleeping area.

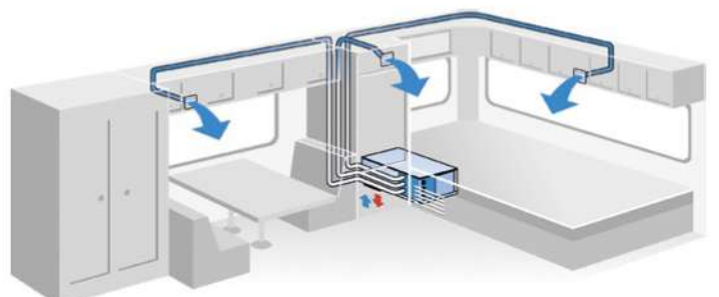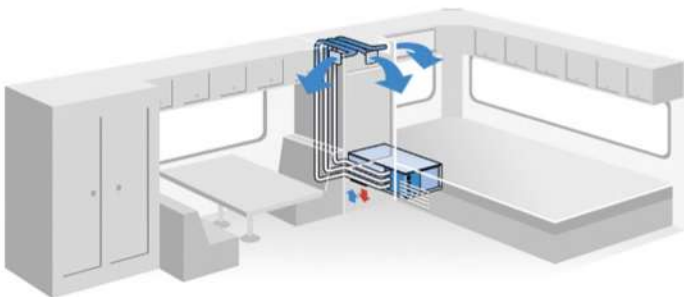



## DOMETIC FRESHWELL 3000

Under-bench air conditioner with 2700 watts for vehicle lengths of up to 8 m

- Cooling capacity: 2700 watts / 9200 Btu/h
- Heating capacity (heat pump + heating element): up to 3000 watts\*
- Soft start function
- Can be operated even while driving



## REMOTE CONTROL

All of the functions can be effortlessly activated by remote control: ON/OFF / temperature selection / blower speed / operating mode / digital function

The digital display shows the setting selected, e.g. temperature, blower speed, timer function, etc.

## REQUIRED ACCESSORIES FOR INDIVIDUAL AIR DISTRIBUTION



Curve 90°, ø 60 mm  
Ref. No. 9100300015



Circular air inlet grill  
2 pieces, ø 190 mm  
Ref. No. 9100300018



Air outlet grill kit  
3-pieces, ø 60 mm  
Ref. No. 9100300077




Flexible hose  
ø 60 mm x 10 m  
Ref. No. 9100300019



Rectangular air inlet grill  
240 x 240 mm  
Ref. No. 9100300017

\* When the ambient temperature drops, the heating capacity of the heat pump reduces. We recommend you operate this at ambient temperatures of + 2 degrees C and above.

|                                                                                    |
|------------------------------------------------------------------------------------|
|  |
| <b>FRESHWELL 3000</b>                                                              |
| 9105305764                                                                         |
| max. 8                                                                             |
| 2700/9200                                                                          |
| 3000 *2                                                                            |
| 990 / —<br>1100                                                                    |
| 4,3 / —<br>4.8                                                                     |
| 5<br>5                                                                             |
| R410a                                                                              |
| 400 x 286 x 628                                                                    |
| —                                                                                  |
| —                                                                                  |
| 21                                                                                 |



|                                                                   |
|-------------------------------------------------------------------|
| 3 air outlets                                                     |
| 3 air outlets (optional) to be placed centrally or where required |
| 3                                                                 |
| •                                                                 |
| E-approved to EMC / automotive directive                          |
| —                                                                 |
| —                                                                 |
| —                                                                 |

